

PERFORMANCE
RELIABILITY
AND
VALUE

Professional 4x4 HDMI Matrix Switcher with RS-232

HDMI 4x4 Matrix Switcher with built-in EDID Management, HDCP & RS-232



The KanexPro HDMI 4x4 Matrix is an ultra-high performance, digital matrix switcher engineered to route high-resolution HDMI signals from 4 inputs to 4 outputs. The unit provides full HDCP internal management for today's integration in commercial A/V market, ensuring HDCP key authentication, and administering the handshake internally.

It maintains resolutions up to 1920 x 1200 or full HD 1080p/60 supporting full cross point switching. Also provides built-in EDID management for recognizing multiple display formats and sources.

Features

- Fast-switch four HDMI/DVI sources to four displays
- Supports bandwidth up to 10.2 Gbps
- Built-in EDID & HDCP internal management
- HDCP 1.3 complaint
- Supports all 3D formats
- Supports High Speed HDMI Specifications (Deep Color, Lip Sync, and HD lossless audio formats)
- Supports full HD 1080p (1920x1080@60Hz)
- Computer resolutions up to WUXGA (1920x1200@60Hz)
- Supports DDC transmission
- Automatic gain compensation and equalization up to 100ft (30m)
- Supports Dolby digital-true HD, DTS-HD
- CEC protocol pass-through
- Front-panel LEDs for input/output signal presence

About KanexPro

KanexPro carries a broad selection of A/V connectivity products by leveraging the core strength in professional systems enabling you to broadcast, convert, extend, split, or multiply HD signal transmissions; simply and cost-effectively.

KanexPro

1405 Pioneer St.
Brea CA 92821

888-644-4149

info@kanexpro.com

www.kanexpro.com

Specifications

Video Input:

- Input: 4 HDMI
- Input Connector: HDMI 1.3
- Input Level: T.M.D.S. 2.9V/3.3V
- Input Impedance: 75Ω


Video Output:

- Output: 4 HDMI
- Output Connector: HDMI 1.3
- Output Level: T.M.D.S. 2.9V/3.3V
- Output Impedance: 75Ω

Video General:

- Gain: 0 dB
- Video Signal: HDMI (or DVI-D)
- Resolution Range: Up to 1920 x 1200 or 1080P@60Hz
- Bandwidth: 340 MHz (10.2 Gbit/s)

- Maximum Pixel Clock: 165MHz
- Switching Speed: 200ns (Max.)

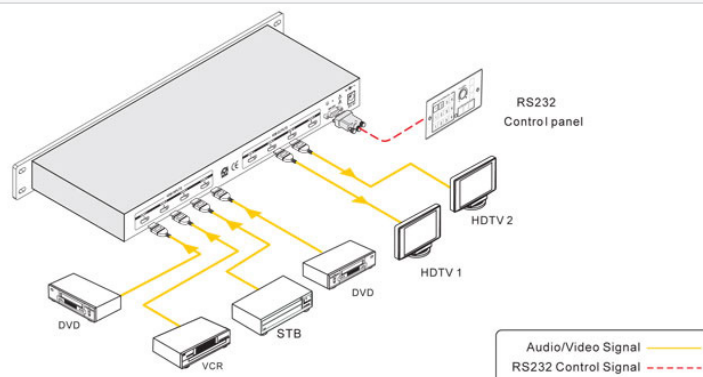

MPN: HDMX44RS